


MAGNETON

ALTERNATOR 9515 461

IMPORTANT DIMENSIONS TO FIT ON ENGINE

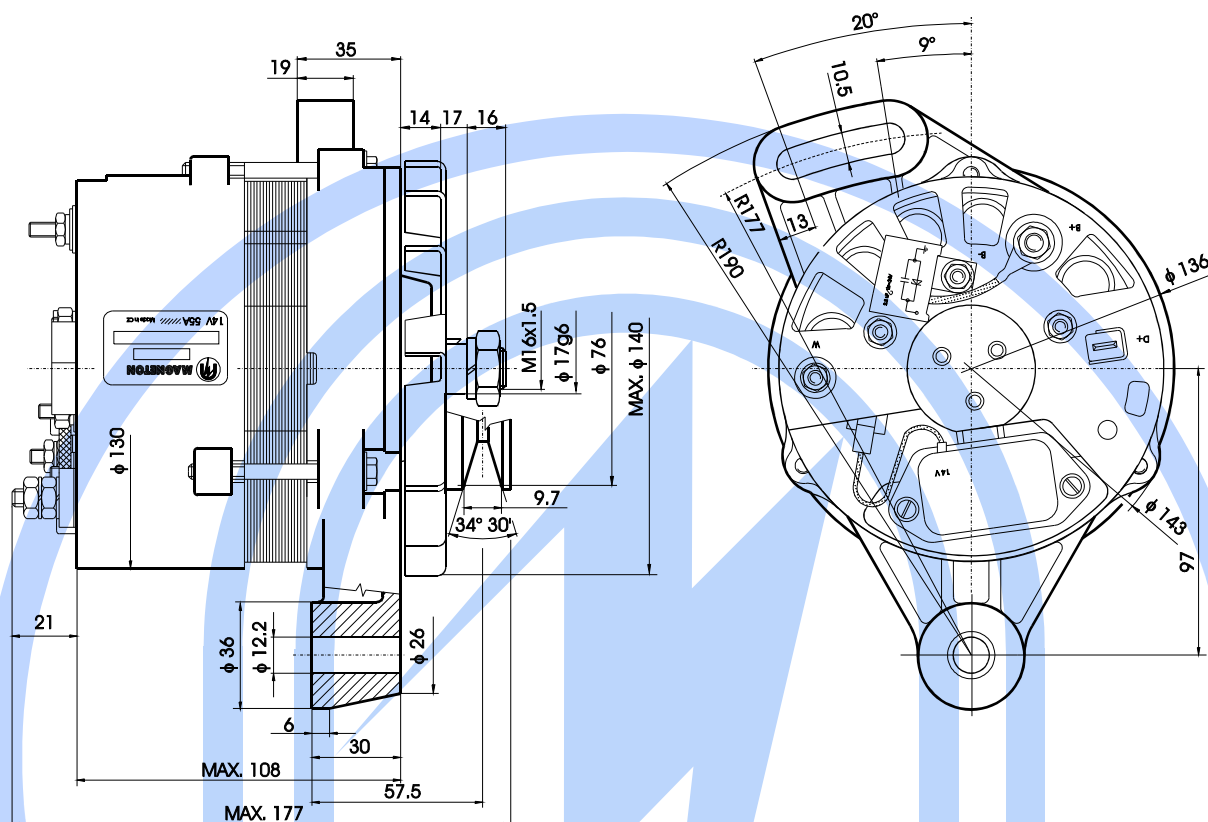

TECHNICAL DATA

Nominal voltage 14V
Rated current at 1 800min⁻¹ 31A
Rated current at 6 000min⁻¹ 55A

Maximum speed 13 000min⁻¹
Zero speed 1 000min⁻¹
Weight 4,9kg

APPLICATIONS

1. URSUS

CROSS REFERENCES

ELMOT
URSUS

A 125- 55W1
7017 132 M1

Použití alternátoru 9515 461

Applications of alternator 9515 461

Page 2 / 3

BRAND	MODEL	TYPE	ENGINE kW	PS	ccm	PRODUCTION YEAR
URSUS	2812		35		2 500	
URSUS	3502		35		2 500	
URSUS	3512		35		2 500	
URSUS	3514		35		2 500	
URSUS	3822					
URSUS	3824					
URSUS	4502					
URSUS	4504		44		3 800	
URSUS	4512		44		3 800	
URSUS	4514		44		3 800	
URSUS	4822					
URSUS	4824					
URSUS	5312		44		3 800	
URSUS	5314		44		3 800	
URSUS	5322					
URSUS	5324					
URSUS	5712					
URSUS	5714		59		4 000	
URSUS	6012					
URSUS	6014					

Náhradní díly alternátoru 9515 461

Spare parts of alternator 9515 461

Page 3 / 3

1.0 Víko přední sestavené Front cover assy		Cat. No. 0139330
2.0 Rotor sestavený Rotor assy		Cat. No. 0135141
3.0 Víko zadní sestavené Rear cover assy		Cat. No. 0141151
4.0 Usměrňovací blok Rectifier		Cat. No. 0140830
5.0 Držák uhlíků s regulátorem Brush holder with regulator		Cat. No. 0143410
6.0 Stator sestavený Stator assy		Cat. No. 0136071
7.0 Řemenice Pulley		Cat. No. 6021157
8.0 Ventilátor Fan		Cat. No. 5233457

Poznámka Note

1. *Víko přední sestavené je dodáváno včetně předního ložiska.*
Front cover assembly is supplied with front bearing.
2. *Rotor sestavený je dodáván včetně zadního ložiska.*
Rotor assembly is supplied with rear bearing.
3. *Víko zadní sestavené je dodáváno včetně usměrňovače.*
Rear cover assembly is supplied with the rectifier.

