


MAGNETON

STARTER MOTOR

9142 840

IMPORTANT DIMENSIONS TO FIT ON ENGINE

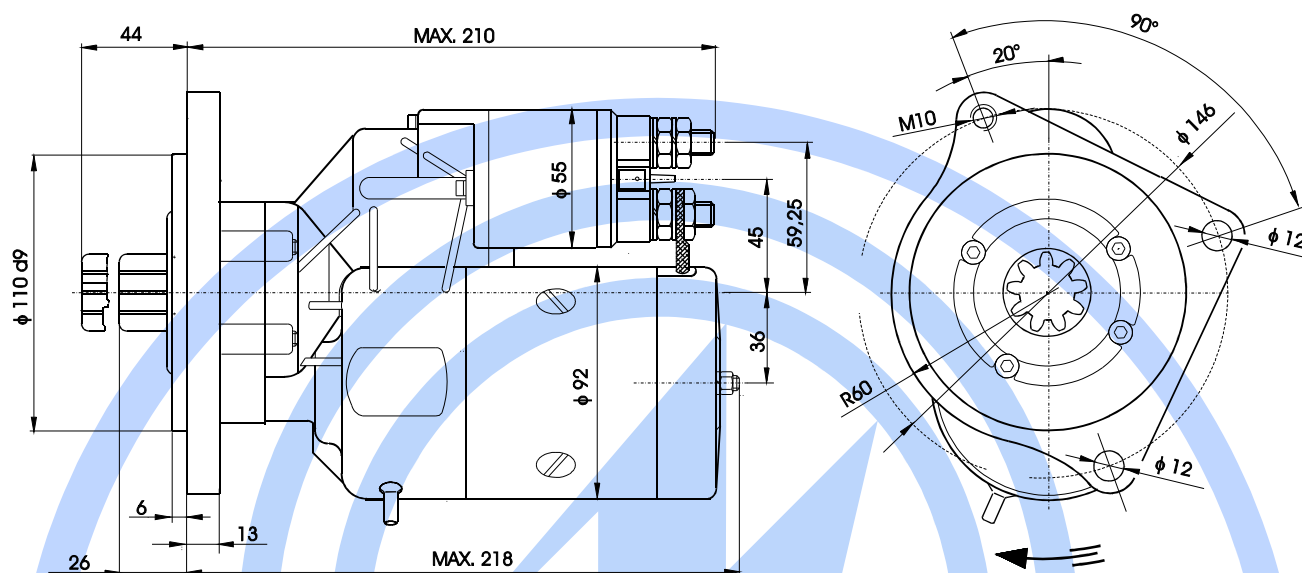

TECHNICAL DATA

Nominal voltage
Rated output
Rated speed
Static torque

12V
2,7kW
1 500min⁻¹
55Nm

Pinion teeth number
Module
Pressure angle
Weight

9
3,0
20°
5,3kg

APPLICATIONS

1. FIAT
2. IVECO

CROSS REFERENCES

Bosch	0 001 218 174; 0 001 218 774 0 001 362 102 0 986 017 490
Delco Remy	DRS7490; DRS1060
Iskra	IS 0532; 11.130.532; AZJ3156 IS 9438; 11.139.445; AZE4144
Lucas	LRS00838; LRT00138
Valeo	438169; 458192
HC Parts	CS 689; CS 1118
Hella	8EA 730 205-001; 8EA 737 578-001
Fiat	42498678; 4711699; 4719664 4745930; 4807374
IVECO	93828721; 99451753

09 / 2012

Použití spouštěče 9142 840

Applications of starter motor 9142 840

Strana 2 / 4
Page

BRAND	MODEL	TYPE	ENGINE kW	PS	ccm	PRODUCTION YEAR
AIFO	8141.61.200				2 400	- 05/83
ALFA ROMEO	30AR8	8140.61.200			2 500	04/78 - 12/89
ALFA ROMEO	32AR8	8140.61.200			2 500	04/78 - 09/89
ALFA ROMEO	35AR8	8140.61.200			2 500	04/78 - 12/89
ALFA ROMEO	35AR8 Turbo	8140.21.200D1			2 500	04/85 - 12/88
ALFA ROMEO	40AR8	8140.61.200			2 500	04/78 - 12/88
ALFA ROMEO	40AR8 Turbo	8140.21.200D1			2 500	04/85 - 12/88
BENFRA	1.05	8131.101			1 800	09/84 - 01/88
FIAT	Campagnola 2.50	8142.61			2 500	06/78 - 10/88
FIAT	Daily 28F8	8140.61.204			2 500	04/78 - 07/82
FIAT	Daily 30F8	8140.61			2 500	04/78 - 12/82
FIAT	Daily 32F8	8140.61			2 500	04/78 - 10/80
FIAT	Daily 35F8	8140.61			2 500	04/78 - 12/82
FIAT	Daily 40F8	8140.61			2 500	04/78 - 12/82
FIAT	I 67.00	SOFIM 8141			2 600	01/90 -
FIAT OM CARELLI	DI 2S	8141.67.01			2 400	01/86 -
IVECO	A 40-8					03/80 -
IVECO	A 49-10					07/88 -
IVECO	Daily I 30-10		76		2 798	01/98 -
IVECO	Daily I 30-10C		76		2 798	01/98 -
IVECO	Daily I 30-10V		76		2 798	01/97 -
IVECO	Daily I 30-8		55		2 499	01/92 - 08/95
IVECO	Daily I 30-8		60		2 499	01/93 - 08/98
IVECO	Daily I 30-8		53		2 499	01/78 - 12/89
IVECO	Daily I 30-8		62		2 798	09/98 -
IVECO	Daily I 30-8V		62		2 798	09/98 -
IVECO	Daily I 30-8V		60		2 499	01/96 - 08/98
IVECO	Daily I 35-10		68		2 445	01/85 - 12/89
IVECO	Daily I 35-10		76		2 798	01/96 -
IVECO	Daily I 35-10K		76		2 798	01/97 -
IVECO	Daily I 35-10V		76		2 798	01/96 -
IVECO	Daily I 35-10C		68		2 445	01/85 - 12/89
IVECO	Daily I 35-12		90		2 798	05/96 -
IVECO	Daily I 35-12K		90		2 798	06/96 - 08/98
IVECO	Daily I 35-8		62		2 798	09/98 -
IVECO	Daily I 35-8		55		2 499	01/89 - 08/98
IVECO	Daily I 35-8		53		2 445	12/78 - 12/85
IVECO	Daily I 35-8K		62		2 798	09/98 -
IVECO	Daily I 35-8V		62		2 798	09/98 -
IVECO	Daily I 35-8C		55		2 499	01/91 - 08/98
IVECO	Daily I 35-8V		53		2 445	01/78 - 12/89
IVECO	Daily I 40-10W		76		2 798	01/97 -
IVECO	Daily I 40-10WV		76		2 445	01/97 -
IVECO	Daily I 40-8		53		2 445	01/83 - 06/85
IVECO	Daily I 40-8V		53		2 445	01/83 - 06/89
IVECO	Daily I 45-10		68		2 445	01/85 - 12/89
IVECO	Daily I 45-10V		68		2 445	01/85 - 12/89
IVECO	Daily I 49-10		76		2 798	05/96 -
IVECO	Daily I 49-10		68		2 445	01/85 - 12/89
IVECO	Daily I 49-10K		76		2 798	05/96 -

Použití spouštěče 9142 840

Applications of starter motor 9142 840

Strana 3 / 4
Page

BRAND	MODEL	TYPE	ENGINE kW	PS	ccm	PRODUCTION YEAR
IVECO	Daily I 49-10V		68		2 445	01/85 - 12/89
IVECO	Daily I 49-12		90		2 798	05/96 -
IVECO	Daily I 49-12K		90		2 798	05/96 -
IVECO	Daily I 49-12V		90		2 798	05/96 -
IVECO	Daily I 59-12		90		2 798	05/96 -
IVECO	Daily I 59-12K		90		2 798	05/96 -
IVECO	Daily I 59-12V		90		2 798	05/96 -
IVECO	Daily I A 40-10		76		2 798	09/96 -
IVECO	Daily I A 40-12		90		2 798	05/96 -
IVECO	Daily I A 45-10		76		2 798	05/96 -
IVECO	Daily I A 45-12		90		2 798	05/96 -
IVECO	Daily/Grinta 26-8					08/80 - 02/89
IVECO	Daily/Grinta 20-8	8140.61.200			2 400	04/78 - 08/89
IVECO	Daily/Grinta 32-8					08/80 - 02/89
IVECO	Daily/Grinta 35-10 T	8140.21.200			2 400	02/85 - 05/89
IVECO	Daily/Grinta 35-8	8140.61.200			2 400	04/78 - 06/89
IVECO	Daily/Grinta 40-10 T	8140.27S			2 400	02/85 - 05/89
IVECO	Daily/Grinta 40-8	8140.61.200			2 400	01/83 - 05/89
IVECO	Daily/Grinta 45-10 T	8140.21.200			2 400	02/85 - 06/89
IVECO	Daily/Grinta 49-10 T	8140.21.200			2 500	02/85 - 06/89
IVECO	Daily/Grinta 49-10 T	8140.21.214			2 500	07/88 - 05/89
IVECO		Sofim 9131.61.210			1 800	01/83 - 12/89
IVECO		Sofim 8140.21.235			2 400	06/67 - 12/89
IVECO		Sofim 8141.61.203			2 400	10/64 - 12/89
IVECO		Sofim 8141.67.203			2 400	07/87 - 12/89
IVECO		Sofim 8141 SI 21.00			2 400	01/90 - 06/90
OM (BRESCIA)	Grinta 300M8	8140.61			2 400	04/76 - 12/83
OM	Grinta 320M8	8140.61			2 400	04/78 - 10/80
OM	Grinta 350M8	8140.61			2 400	04/76 - 12/82
OM	Grinta 400M8	8140.61			2 400	04/78 - 12/82
SAURER	Grinta 300M8	8140.61			2 400	04/78 - 12/82
SAURER	Grinta 320M8	8140.61			2 400	04/78 - 12/82
SAURER	Grinta 650M8	8140.61			2 400	04/78 - 12/82
UNIC	30U8	8140.61			2 400	04/78 - 12/82
UNIC	35U8	8140.61			2 400	04/78 - 12/82
UNIC	40U8	8140.61			2 400	04/78 - 12/82
ZASTAVA	Rival 30.8					

Náhradní díly spouštěče 9142 840

Spare parts of starter motor 9142 840

Strana 4 / 4
Page

1.0 Víko přední Front bracket	Cat. No. 6956350
2.0 Náhon pastorku Pinion drive	Cat. No. 7155080
2.1 Hřídel pastorková Pinion shaft	Cat. No. 3470030
2.2 Ložisko Bearing	Cat. No. 324165033
2.3 Volnoběžka sestavená Clutch drive assy	Cat. No. 7157980
2.4 Ložisko Bearing	Cat. No. 324165032
2.5 Volnoběžka Clutch	Cat. No. 7157970
3.0 Víko převodové Gear bracket	Cat. No. 1658620
4.0 Kotva sestavená Armature assy	Cat. No. 715154A2
5.0 Stator s držákem kartáčů Stator with brush holder	Cat. No. 7153790
5.1 Nosič kartáčů sestavený Brush holder assy	Cat. No. 7153220
5.2 Sada kartáčů Brush set	Cat. No.
6.0 Spínač sestavený Contactor assy	Cat. No. 7154521
6.1 Víčko sestavené Lid assy	Cat. No. 7154530
6.2 Pružina Spring	Cat. No. 4600207
7.0 Páka vysouvací Operation lever	Cat. No. 5233940
8.0 Víko zadní Rear bracket	Cat. No. 165843C

Poznámka Note

- Spínač sestavený bude dodáván včetně 3ks šroubů M5x45.
Contactor assy will be supplied with 3 pcs. screw M5x45.
- Víko převodové bude dodáváno včetně ložiska HK2212, komínku a ucpávky
Transmission cover will be supplied with bearing HK2212, dewatering and sealing.
- Pastorková hřídel bude dodávána včetně pružiny, zajišťovacího a pojistného kroužku.
Pinion shaft will be supplied with shoting spring, stop ring and lock spring.

