

ULTRA SLIM BEACON L-UFO II

EN

SPECIFICATIONS

Multiple units are synchronizable and can flash simultaneously.



Reverse polarity protection.

Waterproof and vibration resistant design for external or internal use.


Voltage	12-24 VDC
LED qty	18x
Max current	12V - 1,7A/24V - 0,85A
IP rating	IP67
Multi-Unit Sync	more than 15 pcs
Approval	EMC R10, ECE R65
Temperature reliability	-30 °C až +60 °C
Flash patterns	3x / 7x (depends on type of beacon)

3 BOLTS


- red: positive
- black: negative
- yellow: flash pattern selector, apply to black wire
- white: synchronization



MAGNET



FLEXI DIN

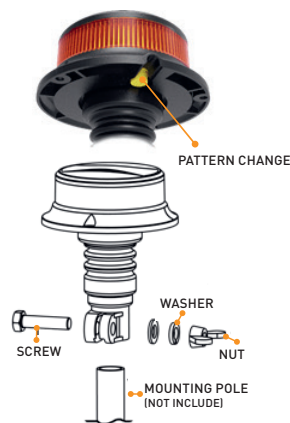

WARNING!

- Do not look directly into LEDs while in operation; may cause momentary blindness and/or eye damage.
- It is not recommended to use magnetically mounted warning devices on vehicles in motion, suggest if need to use available bolt installation on vehicles in motion. Usage is at sole risk and responsibility of the user.