


MAGNETON

ALTERNATOR 9516 983

IMPORTANT DIMENSIONS TO FIT ON ENGINE

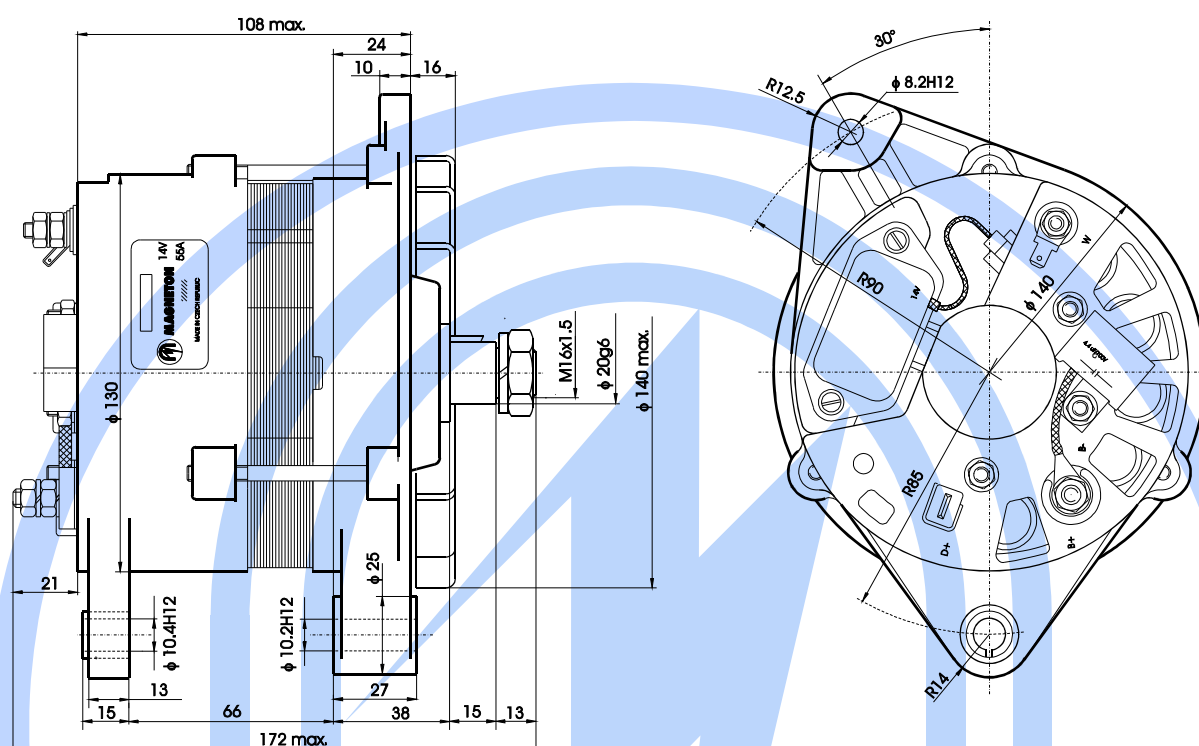

TECHNICAL DATA

Nominal voltage 14V
Rated current at 1 800min⁻¹ 27A
Rated current at 6 000min⁻¹ 55A

Maximum speed 9 000min⁻¹
Zero speed 1 100min⁻¹
Weight 4,7kg

APPLICATIONS

1. ZETOR

CROSS REFERENCES

ZETOR 53.359.985
this alternator is replacing 9516 963

78.350.922
this alternator is replacing 9516 653

Náhradní díly alternátoru 9516 983

Spare parts of alternator 9516 983

Page 3 / 3

1.0 Víko přední sestavené Front cover assy		Cat. No. 0133220
2.0 Rotor sestavený Rotor assy		Cat. No. 0133211
3.0 Víko zadní sestavené Rear cover assy		Cat. No. 0141391
4.0 Usměrňovací blok Rectifier		Cat. No. 0142741
5.0 Držák uhlíků s regulátorem Brush holder with regulator		Cat. No. 0143710
6.0 Stator sestavený Stator assy		Cat. No. 0135791
7.0 Řemenice Pulley		Cat. No. -
8.0 Ventilátor Fan		Cat. No. 5233530

Poznámka Note

1. *Víko přední sestavené je dodáváno včetně předního ložiska.*
Front cover assembly is supplied with front bearing.
2. *Rotor sestavený je dodáván včetně zadního ložiska.*
Rotor assembly is supplied with rear bearing.
3. *Víko zadní sestavené je dodáváno včetně usměrňovače.*
Rear cover assembly is supplied with the rectifier.

