


MAGNETON

ALTERNATOR

9515 483

IMPORTANT DIMENSIONS TO FIT ON ENGINE

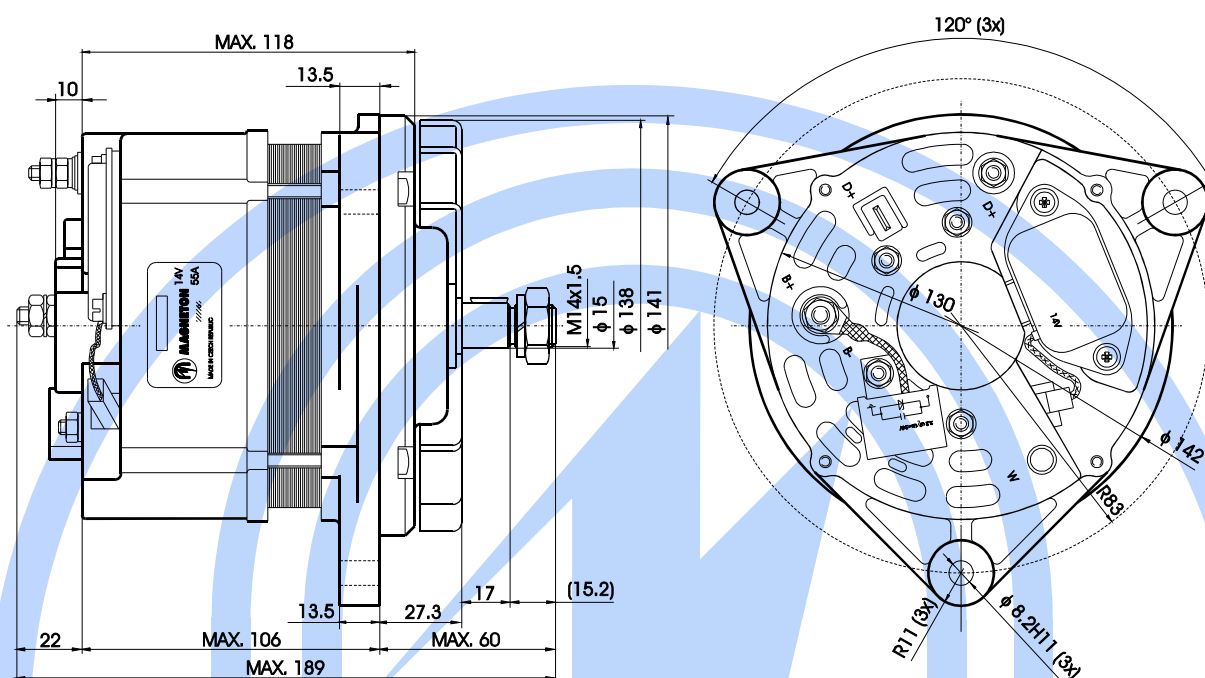

TECHNICAL DATA

Nominal voltage
Rated current at 1 800min⁻¹
Rated current at 6 000min⁻¹

14V
28A
55A

Maximum speed
Zero speed
Weight

13 000min⁻¹
1 000min⁻¹
5,1kg

APPLICATIONS

Alternator with separate wrapped
CW fan without pulley.

1. MASSEY - FERGUSON
2. URSUS

CROSS REFERENCES

ZSE Namysłów


A115 - 34a
A133 - 55a

Použití alternátoru 9515 483

Applications of alternator 9515 483

Page 2 / 3

BRAND	MODEL	TYPE	ENGINE kW	PS	ccm	PRODUCTION YEAR
MASSEY - Ferguson	MF 235					
MASSEY - Ferguson	MF 255					
URSUS	2812					
URSUS	3512					
URSUS	C - 360 3P					

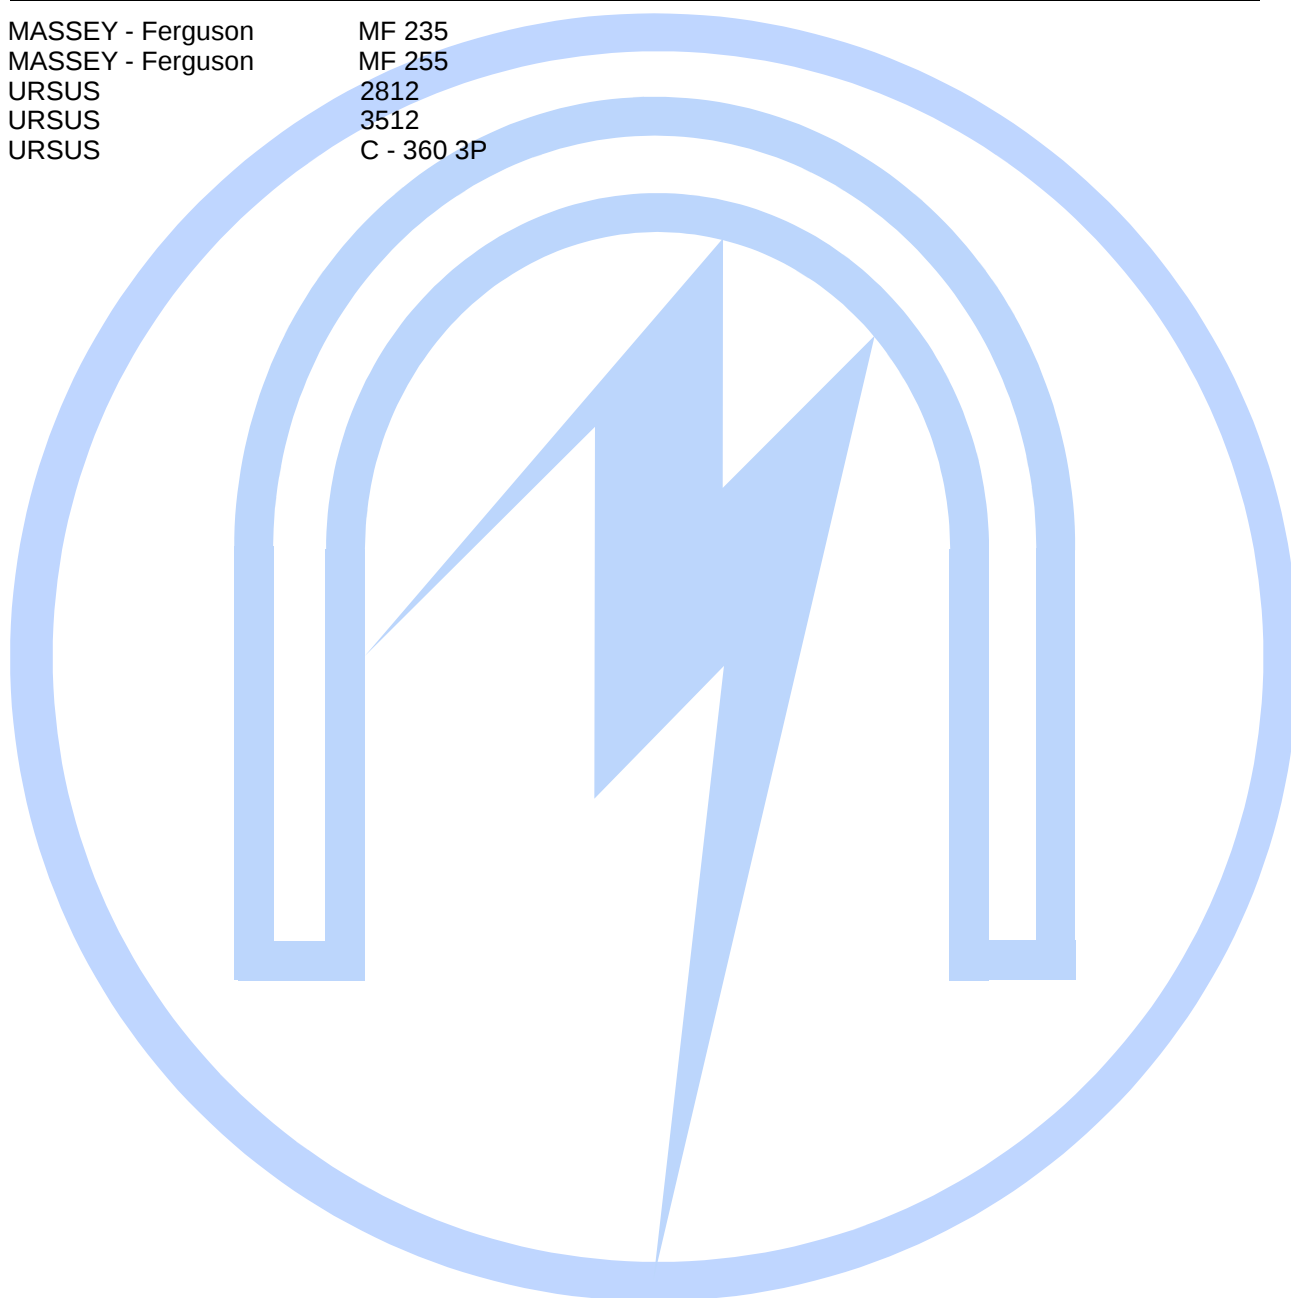

Náhradní díly alternátoru 9515 483

Spare parts of alternator 9515 483

Page 3 / 3

1.0 Víko přední sestavené Front cover assy		Cat. No. 0140340
2.0 Rotor sestavený Rotor assy		Cat. No. 0140351
3.0 Víko zadní sestavené Rear cover assy		Cat. No. 0141161
4.0 Usměrňovací blok Rectifier		Cat. No. 0140981
5.0 Držák uhlíků s regulátorem Brush holder with regulator		Cat. No. 0143410
6.0 Stator sestavený Stator assy		Cat. No. 0139411
7.0 Řemenice Pulley		Cat. No. -
8.0 Ventilátor Fan		Cat. No. 5233457

Poznámka Note

1. Víko přední sestavené je dodáváno včetně předního ložiska.
Front cover assembly is supplied with front bearing.
2. Rotor sestavený je dodáván včetně zadního ložiska.
Rotor assembly is supplied with rear bearing.
3. Víko zadní sestavené je dodáváno včetně usměrňovače.
Rear cover assembly is supplied with the rectifier.

